



* 700 Min where speeds are 65 km/h or less.


CHANNELIZERS

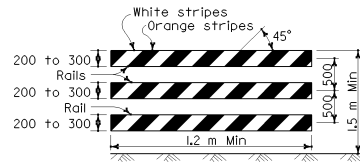

TYPE III BARRICADE



TYPE II BARRICADE



TYPE I BARRICADE

See Note A

BARRICADES (See Note 3)

Only face of rails shown. Barricade construction materials and supports as specified in the specifications.

TABLE 2 - BARRICADES

| BARRICADE | TYPE I | TYPE II | TYPE III |
|--------------------------------------|------------------------|------------------------|--|
| Width of Rail | 200 Min-300 Max * | 200 Min-300 Max * | 200 Min-300 Max * |
| Length of Rail | 0.6 m Min | 0.6 m Min | 1.2 m Min |
| Width of Stripes * * | 150 | 150 | 150 |
| Height | 0.9 m Min | 0.9 m Min | 1.5 m Min |
| Number of Retroreflective Rail Faces | 2 (one each direction) | 4 (two each direction) | 3 if facing traffic in one direction 6 if facing traffic in two direction |


* For the wooden option dimensions are nominal lumber dimensions.

* * For rails less than 0.9 m long, 100 mm wide stripes shall be used.

NOTE A

Barricades to have a minimum of 0.17 m² of retroreflective area facing traffic when used on freeways, expressways, and other high speed highways.

CLASS I FLEXIBLE POST DELINEATORS



CLASS 2 METAL POST DELINEATORS

See Note 4



| | | | | | |
|--|--------|-------|------------------------------|-----------|--------------|
| DIST | COUNTY | ROUTE | KILOMETER POST TOTAL PROJECT | SHEET NO. | TOTAL SHEETS |
| | | | | | |
| July 1, 2004 PLANS APPROVAL DATE The State of California or its officers or agents shall not be responsible for the accuracy or completeness of electronic copies of this plan sheet. To get to the Caltrans web site, go to: http://www.dot.ca.gov | | | | | |

| TYPE | TABLE 1 - DELINEATORS | |
|------|-----------------------|---------------------|
| | FRONT | BACK |
| E | White | White (See Note 1) |
| F | White | None |
| G | Yellow | None |
| I | Yellow | Yellow (See Note 1) |
| J | Red | None |

NOTES

- The retroreflective sheeting used on the back of delineator shall be a minimum size of 75 mm x 75 mm.
- The type of delineator to be installed will be designated on the plans.
- All barricade stripes shall be retroreflective.
- See Standard Plan A73B for Metal Post Details.
- Unless shown otherwise on the plans, or as directed by the Engineer, the color of the retroreflective sheeting for permanent channelizers shall conform to the color of the pavement markings it supplements.
- Except, Class 1 (Flexible Post) temporary delineators and temporary channelizers in work zones shall be orange post with white retroreflective sheeting.

STATE OF CALIFORNIA
DEPARTMENT OF TRANSPORTATION

DELINEATORS, CHANNELIZERS AND BARRICADES

NO SCALE

ALL DIMENSIONS ARE IN
MILLIMETERS UNLESS OTHERWISE SHOWN

A73C